

## IND JP 30 / DIESEL GENERATOR GROUP

<b>Generator Model</b> : IND JP 30	<b>StandBy Power (ESP)</b> : 30kVA 24kW
<b>Engine</b> : Perkins	<b>Prime Power (PRP)</b> : 27.5kVA 22kW
<b>Alternator</b> : Stamford	<b>Voltage</b> : 380/220 V

### Ratings And Standard Reference Conditions

**Prime Power (PRP)** These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply %10 overload power for 1 hour in 12 hours.


**Standby Power (ESP)** is defined as the maximum power available during a variable electrical power sequence, under the stated operating, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 500 hours of operation per year under average of 70% load. No overload is permitted on these ratings.

**Standard Reference Conditions** air inlet temperature 25°C , barometric pressure 100kPa [110m altitude] and 30% relative humidity.



### General Features :

- ◆ Heavy duty water cooled engine
- ◆ Self excited H class alternator
- ◆ Tropical type radiator with mechanical fan
- ◆ Fully guarded engine-driven fan
- ◆ Static or spare daily fuel tank
- ◆ Fully welded steel baseframe with lifting points
- ◆ Linear vibration isolators between base and engine-generator
- ◆ Starter batteries and connection cables
- ◆ Engine-driven battery charging alternator
- ◆ Industrial exhaust muffler
- ◆ Primary and secondary fuel filters
- ◆ Auto Start control system with digital instrumentation
- ◆ Emergency stop pushbutton
- ◆ Control panel with digital-automatic main control module
- ◆ Indeks Factory load, performance and function tests,
- ◆ Operation & Maintenance Manual
- ◆ Wide range of optional extra features available
- ◆ Block water heater unit

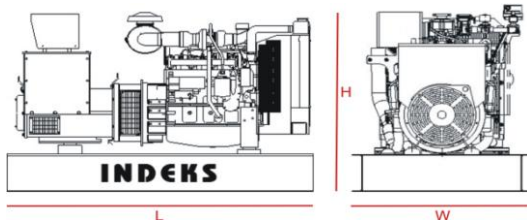

### Overall Dimensions & Weights (Without Canopy)

- ◆ Length (L) 1450 mm
- ◆ Width (W) 750 mm
- ◆ Height (H) 1500 mm
- ◆ Weight 845 kg

**Units**

General		
Brand		INDEKS
Model		IND JP 30
StandBy Power	kVA	30kVA
Prime Power	kVA	27.5kVA

Engine		
Manufacturer		Perkins
Model		1103A-33G
StandBy Power(Net)	kWm	30.4KWm
Prime Power (Net)	kWm	27.7KWm
Speed	Rpm	1500 rpm
Cylinder Number & Arrangement		3 Vertical in-line
Bore & Stroke	mm	105mm x 127mm
Displacement	Lt	3,30
Aspiration & Cooling		Turbo Charged
Compression Ratio		19.25:1
Governor Type		Electronic
Cooling Type		Water Cooled
Oil System Capacity (Including Filters)	Lt	8,20
Fuel System		Direct Injection
Fuel Consumption (%50 of Prime Power)	Lt/h	232 g/KWh / 3.9 L/h
Fuel Consumption (%75 of Prime Power)	Lt/h	214 g/KWh / 5.4 L/h
Fuel Consumption (%100 of Prime Power)	Lt/h	211 g/KWh / 7.1 L/h
Exhaust Gas Flow(at Stand-By Power)	m <sup>3</sup> /min	5,80
Exhaust Gas Temperature (at StandBy Power)	°C	520

Alternator		
Manufacturer		Stamford
Type		Brushless , Synchronous, Single Bearing
Model		PI144F
Phase/Poles		3 Phase/4 Poles
Excitation System		Self Exciting
Frequence	Hz	50
Voltage	V	380/220 V
Speed	Rpm	1500
Excessive Loading Capacity		For 1 Hour % 110, For 2 Minutes %150
Protection Class		IP23
Insulation Class		H

Chassis
<ul style="list-style-type: none"> <li>◆ Formed steel base with linear vibration isolators between base and engine-generator</li> <li>◆ Base frame design incorporates a fuel tank (fuel gauge and drain plug on the fuel tank)</li> <li>◆ Military / Civilian type easy lifting systems</li> </ul>

Control System
<ul style="list-style-type: none"> <li>◆ Control supervision and protection panel is mounted on the genset base frame.</li> <li>◆ Indeks micro processed control unit.</li> <li>◆ Standart indicators, alarms, buttons, keys.</li> <li>◆ Useful design for Automatic / Manuel working</li> </ul>

Optional Equipment	
<ul style="list-style-type: none"> <li>◆ Customer designed sound proof canopy</li> <li>◆ Automatic synchronization and power sharing systems</li> <li>◆ PMG</li> <li>◆ Alternator Heater</li> <li>◆ Trailer</li> <li>◆ Residential Type Silencer</li> <li>◆ Automatic Fuel Refill System</li> <li>◆ Remote Monitoring Systems with SCADA - PLC, Connection to BMS system and extra special solutions in Medium Voltage</li> </ul>	<ul style="list-style-type: none"> <li>◆ Automatic load transfer panel</li> <li>◆ Digital AVR</li> <li>◆ Remote systems</li> <li>◆ Oil Drain Pump</li> <li>◆ Seismic Sensor</li> <li>◆ Tool kits</li> </ul>

**Factory :** A.O.S.B. 10037 Sk. No:11 35580 Cigli / Izmir / Turkey

**Tel :** +90-232-328 19 80 (Pbx) **Fax :** +90-232-328 19 01 **E-Mail :** info@indeks.com.tr **Web :** www.indeks.com.tr

## CONTROL SYSTEM



Photo may be demonstration or a different size generator

### General Features :

The DSE7320 is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

Monitoring an extensive number of engine parameters, the module will display warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LEDs, remote PC and via SMS text alerts (with external modem).

The DSE7320 will monitor the mains (utility) supply and includes USB, RS232 and RS485 ports as well as dedicated DSENet® terminals for system expansion.

Key Features	Key Benefits
<ul style="list-style-type: none"> <li>◆ 4-Line back-lit LCD text display</li> <li>◆ Five key menu navigation</li> <li>◆ Front panel editing with PIN protection</li> <li>◆ LED and LCD alarm indication</li> <li>◆ Customisable status screens</li> <li>◆ 9 configurable inputs</li> <li>◆ 8 configurable outputs</li> <li>◆ 3 configurable maintenance alarms</li> <li>◆ Configurable event log (250)</li> <li>◆ CAN and Magnetic Pick-up/Alt. Sensing</li> <li>◆ Power monitoring (kW h, kV Ar, kV A h, kV Ar h)</li> <li>◆ Load switching (load shedding and dummy load outputs)</li> <li>◆ Backed up real time clock</li> <li>◆ Fully configurable via DSE Config. Suite PC software</li> <li>◆ User selectable RS232 and RS485 communications</li> <li>◆ Power save mode</li> <li>◆ Flexible sender inputs</li> <li>◆ Fuel usage monitor and low fuel alarms</li> <li>◆ Charge alternator failure alarm</li> <li>◆ Manual speed control (on compatible CAN engines)</li> <li>◆ Manual fuel pump control</li> <li>◆ Engine exerciser</li> <li>◆ "Protections disabled" feature</li> <li>◆ kW overload protection</li> <li>◆ Automatic load transfer</li> <li>◆ Independent Earth Fault trip</li> <li>◆ USB connectivity</li> <li>◆ Backed up real time clock</li> <li>◆ Configurable display languages</li> <li>◆ SMS Messaging (additional external modem required)</li> <li>◆ Additional display screens to help with modem diagn.</li> <li>◆ DSENet® expansion compatible</li> </ul>	<ul style="list-style-type: none"> <li>◆ clarity</li> <li>◆ Real-time clock provides accurate event logging</li> <li>◆ Multiple date and time scheduler</li> <li>◆ Set maintenance periods can be configured to maintain optimum engine performance</li> <li>◆ Ethernet communications (via DSE860/865 modules), provides advanced remote monitoring at low cost</li> <li>◆ Modules can be integrated into building management systems (BMS)</li> <li>◆ Increased input and output expansion capability via DSENet®</li> <li>◆ Licence-free PC software</li> <li>◆ IP65 rating (with supplied gasket) offers increased resistance to water ingress</li> </ul>

**Factory :** A.O.S.B. 10037 Sk. No:11 35580 Cigli / Izmir / Turkey

**Tel :** +90-232-328 19 80 (Pbx) **Fax :** +90-232-328 19 01 **E-Mail :** info@indeks.com.tr **Web :** www.indeks.com.tr