




Motive Power Systems



Reserve Power Systems



Special Power Systems



Service

power.com HC

Sealed lead-acid battery

Product features

Customer benefits

- **Electrolyte fixed in glass mat**
 - Reduced maintenance (no water refilling)
 - Horizontal operation (option)
- **Protection against flashback and central degassing integrated in the lid**
 - Enhanced protection against risk of explosion
- **Maximum energy density**
 - Small footprint
- **Smooth battery lid with integral handle**
 - Easy-to-clean surface
 - Easy to handle
- **Composite terminal/system connector**
 - Exclude corrosion
 - Prevent short-circuits even during installation

Main applications:



UPS units



Power Supply




Similar to the illustration

Type overview

Capacities, dimensions and weights


Type	C ₁₀ /1.80 V Ah	C ₅ /1.77 V Ah	C ₃ /1.75 V Ah	C ₁ /1.70 V Ah	C _{1/2} /1.65 V Ah	C _{1/6} /1.60 V Ah	Weight kg	Length L mm	Width W mm	Height H mm	Figure
power.com HC 121200	35.0	33.0	31.5	28.3	25.7	19.2	19.2	229	177	230	A
power.com HC 121600	46.0	44.0	42.3	37.8	34.3	25.7	19.2	229	177	230	A
power.com HC 122000	58.0	55.0	52.8	47.2	42.8	32.0	24.2	229	177	230	A
power.com HC 122400	70.0	66.0	63.3	56.7	51.5	38.3	37.6	344	177	230	B
power.com HC 122800	81.0	77.0	73.8	66.1	60.0	44.8	37.6	344	177	230	B
power.com HC 123200	93.0	88.0	84.3	75.6	68.5	51.2	40.0	344	177	230	B
power.com HC 123800	110.0	104.5	100.2	89.7	81.5	60.8	50.5	498	177	230	C
power.com HC 124200	118.0	111.5	107.1	96.0	87.0	65.0	54.0	498	177	230	C
power.com HC 125300	151.0	129.5	124.2	111.0	101.0	75.5	57.3	498	177	230	C
power.com HC 21750	400.0	374.5	351.7	296.5	256.4	173.2	25.0	178	154	314	D

Fig. A

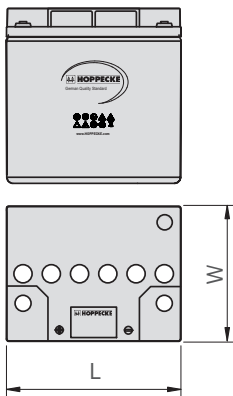


power.com HC 121200 -
power.com HC 122000

Fig. B

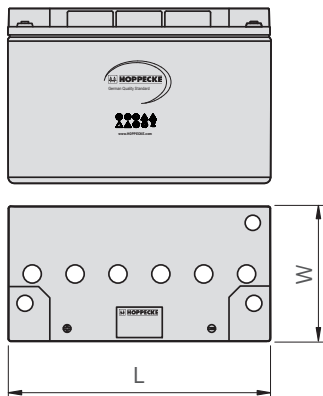


power.com HC 122400 -
power.com HC 123200

Fig. C

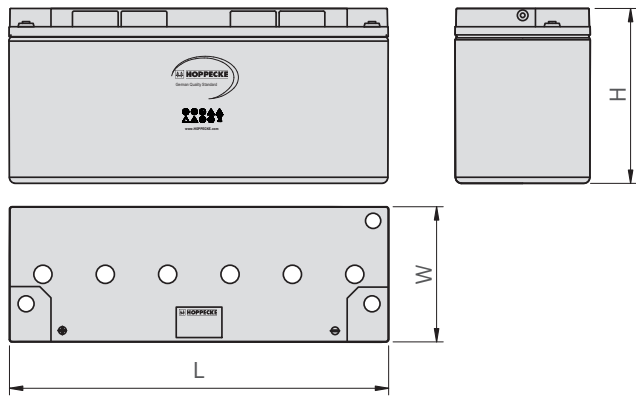

power.com HC 123800 -
power.com HC 125300

Fig. D

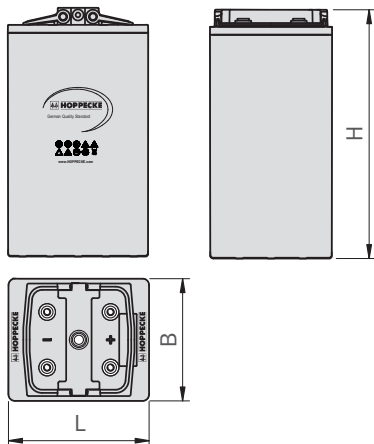

power.com HC 21750

Life expectancy: 10–12 years (acc. to EUROBAT)